


BRUNO 2

modular ceiling

Easy joy!

LIRALIGHTING®
Enjoy Our Light

Bruno LED panel is characterized by very light structure and simple and quick installation in modular ceiling. The luminaire body is made of white painted steel. Possibility to choose the type of diffuser between microprismatic and opal. The luminaire is used in office spaces, public spaces, office buildings and schools.

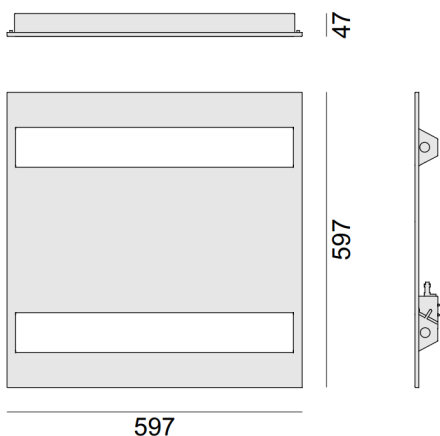

general data

luminaire body	steel
mounting type	modular ceiling 600x600
ingress protection IP	20
operation temperature range	from -40°C to +35°C
lifetime L80B10	60 000h

electrical data

nominal voltage	220-240V AC
nominal frequency	50-60Hz
protection class	I
contains light source	yes
connection	connector through
dimming	none (options: Casambi, ActiveAhead, DALI)

lighting data


light source	LED
colour rendering index	CRI>80
tolerance of luminous flux	+/-10%

optical data

optical system	opal diffuser
material	PMMA
light emission	direct
light distribution	symmetrical

code	power [W]	luminaire power [W]	luminaire flux [lm]	luminaire efficacy [lm/W]	diffuser	dimensions [mm]	height [mm]	weight [kg]	box [mm]
E1007.K	25	27	2760	102	OP	597x597	47	2,9	650x650x100

K-colour temperature



We reserve the right to withdraw and change products from the catalogue at any time without prior notice. The colour options presented in the catalogue may differ from the actual ones. Technical parameters are subject to change.