Tom

Easy joy!
LIRALIGHTING

The construction of the Tom luminaire is based on an aluminum profile. The applied opal diffuser evenly diffuses the light along its surface. It is perfect for offices or reception areas. The luminaires are available in surface mounted, recessed and suspended version.

CE IP44

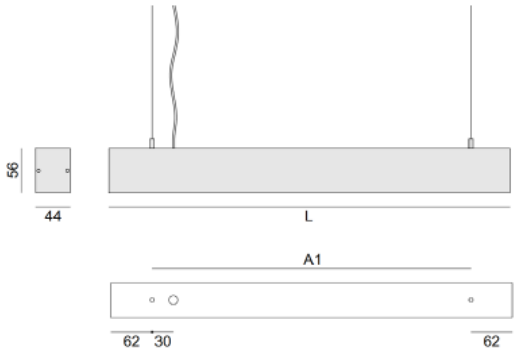

general data	
luminaire body	aluminum
mounting type	suspended
ingress protection IP	44
operation temperature range	from -20°C to +40°C
lifetime L80B10	50 000h
electrical data	
nominal voltage	24V DC
nominal frequency	50-60Hz
protection class	I
contains light source	yes
connection	connector through
dimming	none (options: DALI)
lighting data	
light source	LED
colour rendering index	CRI>80
tolerance of luminous flux	+/-10%
optical data	
optical system	opal diffuser
material	aluminum
light emission	direct
light distribution	symmetrical

code	luminaire power [W]	luminaire flux [lm]	luminaire efficacy [lm/W]	dimensions [mm]	heigh (mm)	weight [kg]	box [mm]
E1110.K.C	8	322	40	606x44	56	1,0	930x70x70

K-colour temperature

03 — 3000K
04 — 4000K

C-standard colour

03 — white
05 — black
06 — light grey

accessories

E10	power supply IP65 75W
E11	power supply IP65 100W
E12	power supply IP65 150W
E13	power supply IP65 200W
E14	power supply IP65 250W

We reserve the right to withdraw and change products from the catalogue at any time without prior notice. The colour options presented in the catalogue may differ from the actual ones. Technical parameters are subject to change.

Liralighting Sp. zo. o. | ul. Saperów 4 | 82-300 Elbląg | info@liralighting.pl | tel. +48 55 236 11 85 | fax. +48 55 232 65 89 | www.liralighting.pl